



**MIAMI-DADE COUNTY**  
**BUILDING CODE COMPLIANCE OFFICE (BCCO)**  
**PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA**  
**METRO-DADE FLAGLER BUILDING**  
**140 WEST FLAGLER STREET, SUITE 1603**  
**MIAMI, FLORIDA 33130-1563**  
**(305) 375-2901 FAX (305) 375-2908**

**NOTICE OF ACCEPTANCE (NOA)**

**ITW BUILDEX**  
**1349 W. Bryn Mawr Ave.**  
**Itasca IL 60143**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone.

**DESCRIPTION: TAPCON SG & SAMMY SSC**

**APPROVAL DOCUMENT:** Drawing No.04-ITW-0001, Sheet 1 of 1, titled "Sammy Screw Concrete Anchors" dated 06/07/06 with last revision on 05/26/06, prepared by Engineering Express signed and sealed by F. L. Bernardo, PE bearing the Miami-Dade County Product Control Approval stamp with the Notice of Acceptance (NOA) number and approval date by the Miami-Dade County Product Control Division.

**MISSILE IMPACT RATING: None**

**LABELING:** Each Box shall bear a permanent label with the manufacturer's name or logo, city, state and the following statement: "Miami-Dade County Product Control Approved or MDCPCA", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of this page, evidence page as well as approval document mentioned above.

The submitted documentation was reviewed by **Candido E. Font, P.E.**

*(Handwritten signature and date)*  
 07/06/06



**NOA No 06-0222.07**  
**Expiration Date: July 06, 2011**  
**Approval Date: July 06, 2006**  
**Page 1**

**ITW BUILDEX**

**NOTICE OF ACCEPTANCE: EVIDENCE PAGE**

**A DRAWINGS:**

1. Drawings prepared by Engineering Express, titled "Sammy Screw Concrete Anchors", Drawing No: 04-ITW-0001, dated 06/07/06 with last revision on 05/26/06, sheet 1 of 1, signed and sealed by F. L. Bennardo, PE.

**B TEST:**

	<b>Test Number</b>	<b>Test Name</b>	<b>Test Date</b>	<b>Test Certification</b>
1.	ARL-30498	ASTM E488	11/18/05	C. A. Hamon PE
2.	ARL-30500	ASTM E488	11/18/05	C. A. Hamon PE
3.	ARL-30499	ASTM E488	11/18/05	C. A. Hamon PE
4.	ARL-30602	ASTM G85	11/18/05	C. A. Hamon PE
5.	ARL-30503	ASTM E488	11/18/05	C. A. Hamon PE
6.	ARL-30502	ASTM E488	11/18/05	C. A. Hamon PE
7.	ARL-30501	ASTM E488	11/18/05	C. A. Hamon PE
8.	ARL-30496	ASTM E488	11/18/05	C. A. Hamon PE
9.	ARL-30497	ASTM E488	11/18/05	C. A. Hamon PE

**C. CALCULATIONS:**

N/A

**D. QUALITY ASSURANCE:**


1. Building Code Compliance Office.

**D MATERIAL CERTIFICATIONS:**

1. Brochure of Tapcon SG and Sammys published by ITW Buildex on 2006.

**E STATEMENTS:**


1. Code compliance letter issued by F. L. Bennardo PE Inc, on 02/13/06, signed and sealed by F. L. Bennardo PE.
2. No interest letter issued by F. L. Bennardo PE Inc, on 02/13/06 and signed by F. L. Bennardo and notarized by D. N. Stuart

  
07/06/06  
Candido F. Font, P.E.  
Senior Product Control Examiner  
NOA No 06-0222.07  
Expiration Date: July 06, 2011  
Approval Date: July 06, 2006

# "TAPCON® SG" & "SAMMYS® S" DIRECT MOUNT STORM PANEL ANCHORING SYSTEM

## GENERAL NOTES:

- 1) THIS PRODUCT HAS BEEN DESIGNED & TESTED IN ACCORDANCE WITH THE 2004 FLORIDA BUILDING CODE (HIGH VELOCITY HURRICANE ZONE) AND THE FOLLOWING STANDARDS: ASTM F488, ASTM D1761, ASTM G85, & TAS 114.
- 2) ANCHORS REPRESENTED HEREIN ARE MANUFACTURED FROM HEAT-TREATED STEEL AND SHALL HAVE CORROSION-RESISTANT COATINGS AS DESCRIBED BELOW:  
TAPCON SG: ULTRASHIELD & WHITE ULTRASHIELD  
SAMMY SSC: BLUE CLIMASEAL
- 3) ANCHOR INSTALLATION SHALL BE MADE IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS AND THIS NOTICE OF ACCEPTANCE.
- 4) CONCRETE SHALL CONFORM TO ACI 301 SPECIFICATIONS, WITH STRENGTH PROPERTIES AS SPECIFIED HEREIN. HOLLOW AND GROUT-FILLED CONCRETE BLOCK SHALL CONFORM TO ASTM C-90.
- 5) PILOT HOLES FOR ALL INSTALLATIONS SHALL BE 3/16"Ø WITH DEPTH 1/4" LONGER THAN INTENDED EMBEDMENT DEPTH.

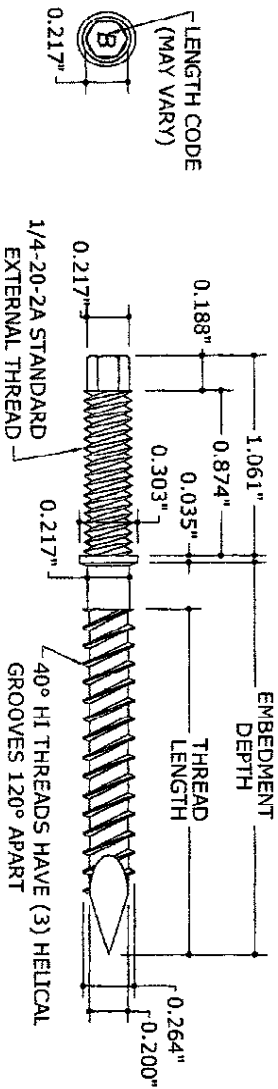

1 "TAPCON SG" SCREW  
1:1 SCALE  
TOP & SIDE VIEWS

## ANCHORS TO CC (MIN 3295 PSI)

ANCHOR	EMBED
1/4" TAPCON SG	1" 1 3/4"
1/4" SAMMYS SSC	1" 2 1/4"

## ANCHORS TO HC (MIN 1500 PSI)

ANCHOR	EMBED
1/4" TAPCON SG	1 1/4"
1/4" SAMMYS SSC	1 1/4"

## ANCHORS TO GR (MIN 2000 PSI GROUT)

ANCHOR	EMBED
1/4" TAPCON SG	1 3/4"
1/4" SAMMYS SSC	2 1/2"

## CAPACITY TABLE

- 1) DESIGN CAPACITIES SHOWN BEEN DETERMINED USING A SAFE
- 2) EMBEDMENT DEPTH TO HOLLOW GROUT-FILLED BLOCK IS THROUGH
- 3) DESIGNATES CONDITION ACCEPTABLE FOR USE.